



# THE RISE OF ELECTRIC VEHICLES IS HAPPENING AT AN UNPRECEDENTED PACE

The latest figures show that there are over


5.6M

electric cars worldwide in 2022

That's already a

64% INCREASE

from the 2018 data

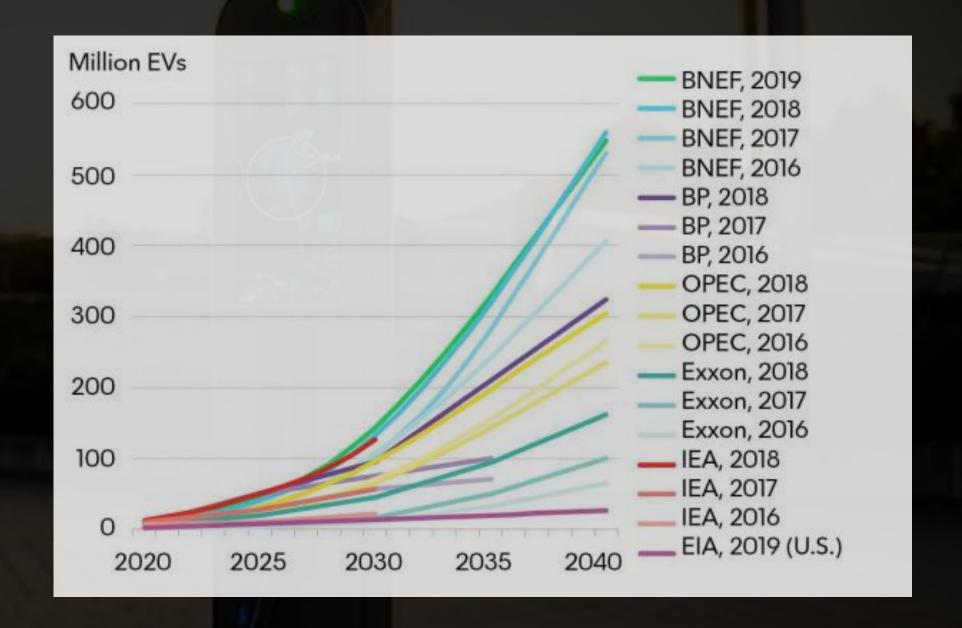

the global electric car stock is projected to rise up to



by 2030

## THE CHALLENGE

At present, more than 50% of consumers are already considering EVs as their next vehicle purchase





However, 33% indicate that a lack of charging infrastructure and accessibility to convenient charging remains their greatest concern when considering the switch to full electric

### introducing



### A TECHNOLOGY FUTURE-PROOF PROVIDER

that aims to removes the barrier to accessibility and scalability for consumers and businesses to meet their sustainability goals while enhancing their customer experience





## WE ARE GEARED FOR THE FUTURE OF ENERGY

**Earthgrade Energy is committed to a sustainable future through the use of renewable energy.** We recognize that individuals and businesses have the power to create positive change, and we aim to empower them with the technology and resources to do so.

We are not just focused on the present, but also on the **future of energy**. Our team is dedicated to innovation and staying ahead of the curve, so we can provide cutting-edge solutions for our customers.

At Earthgrade Energy, we believe in making a positive impact on the world while also providing reliable, affordable, and high-performing products for consumers and businesses alike.



# DISCOVER OUR RANGE OF SUSTAINABLE SOLUTIONS

Introducing our cutting-edge lineup of EV chargers, where innovation meets the limitless potential of renewable energy. Embrace the transformative power of electric mobility as we redefine the way we navigate the world.





### EARTHGRADE ENERGY POWERPLUS PREMIUM I





### INNOVATIVE DESIGN

- Ergonomic enclosure and user-friendly body design
- Trendy streamlined design



### SECURE AND SAFE

- 30mA Type A + 6 mA DC residual current protection
- Anti-welding protection
- Optional PEN-Fault protection



### EARTHGRADE ENERGY POWERPLUS PREMIUM



### WIDE COMPATIBILITY

- Type 1 connector for the American market
- Interoperable with all major automobiles in the North American Market





### FLEXIBLE OPTIONS



- 14-50P/6-50P NEMA input plugs
- Wall-mount or floor-stand installation
- Option for a WiFi version

# POWERING PRODUCTIVITY AND SUSTAINABLE MOBILITY

The PowerPlus Premium EV Charger offers unparalleled convenience and ease of use, making it an excellent choice for residential use or even in workplaces.





### **Three color options:**







Space Black

Emerald Green



Charger units and stands may be sold separately



### PRODUCT SPECIFICATIONS

Datasheet	Model	Earthgrade Energy PowerPlus Premium
Input	Power Supply	Single Phase
	Rated Voltage	240V AC
	Rated Current	40A
	Frequency	60 Hz
	Maximum Current	40A
	Plug	NEMA 14-50P / NEMA 6-50P
Output	Output Power	9.6kW
	Charge Outlet	Type 1
	Cable Length	5m/7m
	Housing Material	Plastic PC940
User Interface	LED Indicator	Green/Yellow/Red
	Housing Material	Plastic PC940
Communication	WiFi	Optional
	Leakage Current Protection	CCID 20
	Enclosure Rating	NEMA 4
Security and Safety	Electrical Protection	Over current protection, Residual current protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over temperature protection
	Certification Standard	UL 2594, UL 2231-1 & -2
	Warranty	2 years
Environment	Installation	Wall-mount/Pole-mount (Optional)
	Work Temperature	-30°C~+50°C
	Work Humidity	5%~95%
	Work Altitude	<2000m
Size	Product Dimension	344*201*135mm(H*W*D)

**Max Output Power** 



Charges as fast as



Tested and certified by UL to ensure safety, durability, and high quality standards




Production Lead Time:



\* from empty to full for small EVs with 40kWh batteries

#### CHARGING VIA APP INSTRUCTIONS

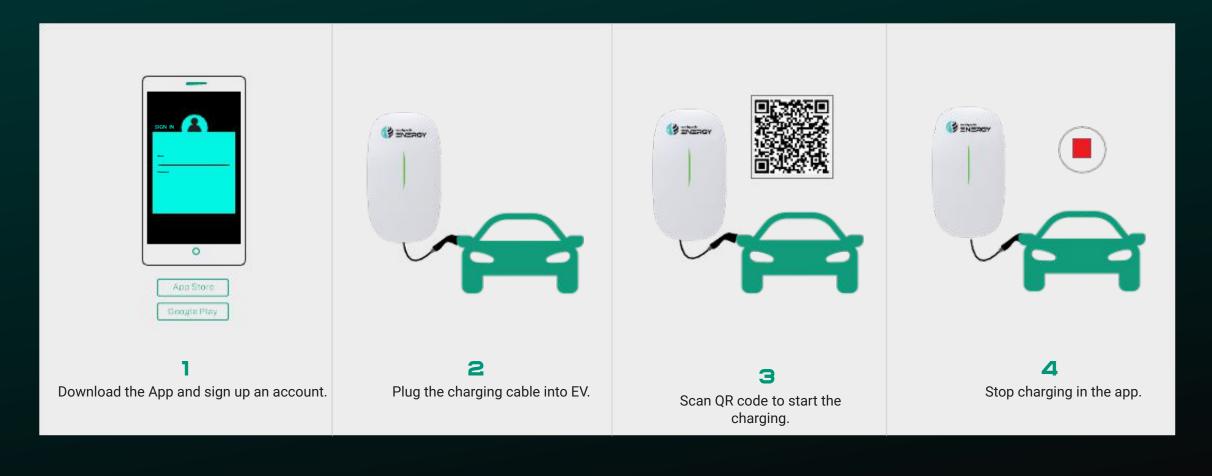

# POWERBOOST PORTABLE EV CHARGER

Earthgrade Energy's PowerBoost EV Charger is designed to make your EV charging reliable and efficient.



Designed for convenience and versatility, this portable charger is the ideal companion for electric vehicle charging wherever you are and ensures you're always ready to go.

**Max Output Power** 




# POWERZONE EV CHARGING STATION

Earthgrade Energy's PowerZone EV Charging Station is excellent for high-power charging.

Built for **fast-charging** and **commercial** needs, our charging station can support remote monitoring and maintenance. This is perfect for use on retail locations, petrol stations or on highways.

**Max Output Power** 



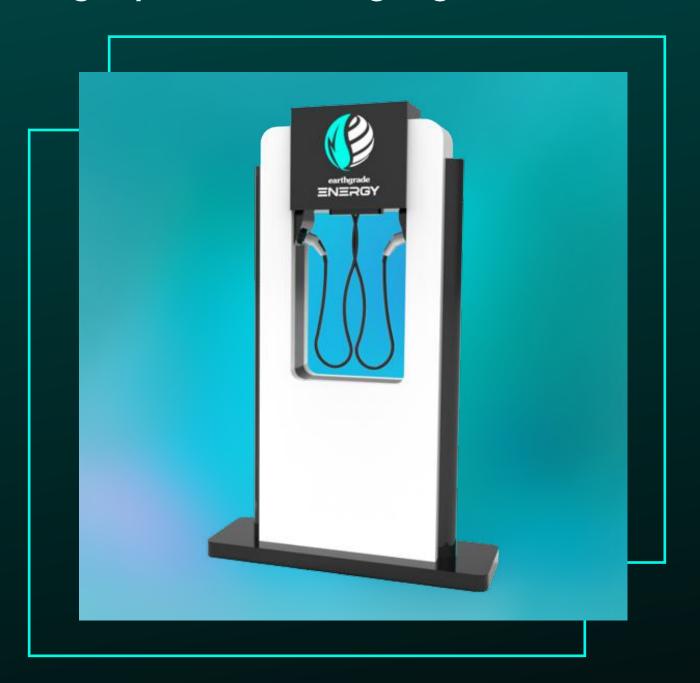

Strictly for commercial use only. Requires product testing and a professional team on the ground for service and assistance.

### PRODUCT SPECIFICATIONS

### POWERBOOST PORTABLE EV CHARGER

Datasheet	Model	Earthgrade Energy PowerBoost
Input	Power Supply	1P+N+PE
	Rated Voltage	230V AC
	Rated Current	13A
	Frequency	50/60 Hz
Output	Output Voltage	230V AC
	Maximum Current	13A
	Rated Power	3.5kW
User Interface	Power Cord Plug	Schuko
	Charge Connector	Type 2 cable
	Cable Length	4m
	Enclosure	Plastic PC940
	LED Indicator	Green/Yellow/Red
	LCD Display	No
	Start Mode	Plug & Charge
	Ingress Protection	IP65
	Impact Protection	IK10
	Electrical Protection	Over current protection, Residual current protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over temperature protection
	Certification Standard	EN IEC 61851-1:2019, IEC 62752
	Warranty	2 years
Environment	Work Temperature	-30°C~+50°C
	Work Humidity	5%~95%
	Work Altitude	<2000m
Size	Product Dimension	195*74*47mm







#### POWERZONE EV CHARGING STATION

	nergy PowerZone EV Charging Station		
PARAMETERS	REQUIREMENTS		
General Requirements			
Charger Capacity	90KW/100KW/120KW		
Mounting	Ground-Mounted		
Input Requirements			
AC Supply System	Three-Phase 5 Wire AC system		
Nominal Input Voltage	AC380V+15%		
Input Frequency	45-65Hz		
Environment Requirements			
Ambient Temperature Range	-25 to 55°C		
Ambient Humidity	5 to 95%		
Storage Temperature	-40 to 70°C		
	Mechanical Requirements		
IP Ratings	IP 54		
Cooling	Air-cooled		
Output Requirements			
Number of Outputs	2		
Type of Each Output	DC200-750V		
Single Output Max. Current	200 Amp		
Power Factor	>0.99(50% load above)		
User Interface & Display Requirements			
Display & Touch-Screen Size	7 Inches Touch Screen with Shell		
User Authencation	Mobile Application or User Interface / QR Code/RFID Card /Password Login		
Metering Information	Consumption Units		
Communication Requirements			
Communication between EVSE and Central server	OCPP 1.6J Protocol (Optional)		
Interface between Charger and CMS	Ethemet/3G/4G/WiFi (Optional)		
Protection & Safety Requirements			
Executive Standard	IEC 62196 2017. EC 61851 2017, SAE J1772,CHAdeMO etc.		
Safety Parameters	Over Current Under Voltage, Residual Current, Surge Protection, Leakage Protection, Short Circuit, Over Temperature etc.		

### THANK YOU

Learn more about our range of sustainable charging solutions.

Reach out to us for more information about our product offerings.

energy@earthgrade.com www.earthgradeenergy.com